




[Machined Series] Eye Socket Fitting

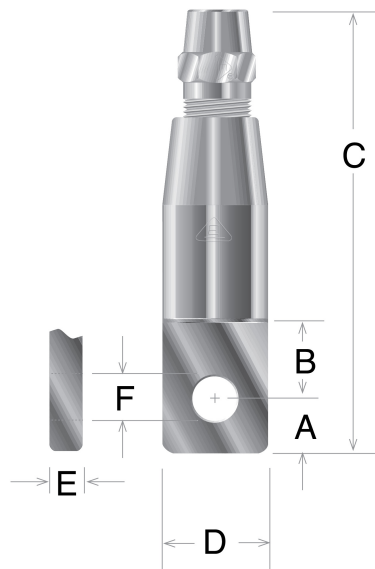

Electroline's eye end rope fitting features a swageless rope termination, allowing it to be quickly installed in the field without special tools or processes.

- Available for ropes from 1/16 to 1-1/2 inches in diameter.
- Fitting strength exceeds the rated breaking strength of most ropes.
- Machined from solid steel; galvanized and zinc-plated options are available for increased corrosion resistance.

Specifications

Termination Type	Swageless
Connector Type	Eye

Available Products

Rope Size (In.)	Part No.			Dimensions (In.)						IPS Breaking Strength (lbs.)
	Self-Colored Steel	Stainless Steel	Zinc Plated Steel	A	B	C	D	E	F	
1/16	ID-206-N	IS-206	ID-206-V	9/32	11/32	2-1/16	1/2	11/64	13/64	480
3/32	ID-209-N	IS-209	ID-209-V	11/32	31/64	2-15/32	5/8	15/64	17/64	920
1/8	ID-212-N	IS-212	ID-212-V	11/32	31/64	2-15/32	5/8	15/64	17/64	1,700
5/32	ID-215-N	IS-215	ID-215-V	13/32	11/16	3	3/4	19/64	21/64	2,400
3/16	ID-218-N	IS-218	ID-218-V	13/32	11/16	3-5/64	3/4	19/64	21/64	3,340
7/32	ID-221-N	IS-221	ID-221-V	1/2	13/16	3-3/4	15/16	23/64	25/64	4,800
1/4	ID-225-N	IS-225	ID-225-V	1/2	13/16	3-3/4	15/16	23/64	25/64	5,880
9/32	ID-228-N	IS-228	ID-228-V	19/32	27/32	4-9/32	1-1/16	23/64	29/64	7,600
5/16	ID-231-N	IS-231	ID-231-V	19/32	27/32	4-9/32	1-1/16	23/64	29/64	9,160
3/8	ID-237-N	IS-237	ID-237-V	21/32	31/32	4-7/8	1-3/16	27/64	33/64	13,120
7/16	ID-243-N	IS-243	ID-243-V	3/4	1-1/16	5-21/32	1-3/8	27/64	41/64	17,780
1/2	ID-250-N	IS-250	ID-250-V	27/32	1-1/8	6-3/8	1-9/16	31/64	45/64	23,000
9/16	ID-256-N	IS-256	ID-256-V	1-1/16	1-3/8	7-19/32	2	21/32	61/64	29,000
5/8	ID-262-N	IS-262	ID-262-V	1-3/32	1-5/16	7-5/8	2	21/32	61/64	35,800
3/4	ID-275-N	IS-275	ID-275-V	1-11/32	1-19/32	8-15/16	2-5/16	23/32	1-9/64	51,200
7/8	ID-287-N	IS-287	ID-287-V	1-1/2	1-13/16	11-1/8	2-5/8	25/32	1-17/64	69,200
1	ID-299-N	IS-299	ID-299-V	1-13/16	2-1/8	12-3/16	3-1/2	29/32	1-33/64	89,800
1-1/8	ID-2112-N	IS-2112	ID-2112-V	2-1/4	2-5/8	14-5/8	3-3/4	1-3/32	1-21/32	130,000

Rope Size (In.)	Part No.			Dimensions (In.)						IPS Breaking Strength (lbs.)
	Self-Colored Steel	Stainless Steel	Zinc Plated Steel	A	B	C	D	E	F	
1-1/4	ID-2125-N	IS-2125	ID-2125-V	2-1/2	3	16-7/8	4	1-7/32	1-13/16	159,800
1-3/8	ID-2137-N	IS-2137	ID-2137-V	3	3-1/4	21-3/8	4-1/4	1-15/32	2-1/32	167,000
1-1/2	ID-2150-N	IS-2150	ID-2150-V	3	3-1/4	21-3/8	4-1/2	1-15/32	2-1/32	197,800

PDF generated on 2026-01-18 at 06:30 by electrolineusa.com. Information is provided for reference only.
Please contact Electroline at info@electrolineusa.com or 1-800-321-0870 to confirm specifications or
discuss customization options.