




## STUD

### Coarse Thread Stud Socket Fitting (Longer/Wider)

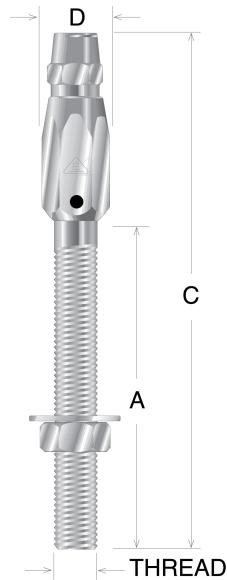

Electroline's stud socket fittings are used for a variety of applications. The swageless rope termination and threaded rod allow a rope to be quickly attached (without special tools or processes) and tensioned using the included washer and nut. The overall length of the fitting and stud diameter varies from GD Series Stud Sockets.

- Available for rope sizes from 9/16 to 1-1/2 inches in diameter.
- Fitting strength exceeds the rated breaking strength of most ropes.
- Material options include self-colored steel; zinc-plated or galvanized steel for corrosion resistance; or stainless steel for a more attractive appearance.

#### Specifications

|                  |           |
|------------------|-----------|
| Termination Type | Swageless |
| Connector Type   | Stud      |

#### Available Products

| Rope Size<br>(In.) | Part No.         |                 | Thread  | Dimensions (In.) |          |        | EIPS Breaking<br>Strength (lbs.) |
|--------------------|------------------|-----------------|---------|------------------|----------|--------|----------------------------------|
|                    | Galvanized Steel | Stainless Steel |         | A                | C        | D      |                                  |
| 9/16               | ID-356-X         | IS-356          | 1-1/8-7 | 8-5/8            | 16-3/16  | 2-3/16 | 33,600                           |
| 5/8                | ID-362-X         | IS-362          | 1-1/8-7 | 8-5/8            | 16-3/16  | 2-3/16 | 41,200                           |
| 3/4                | ID-375-X         | IS-375          | 1-1/4-7 | 9-1/4            | 16-3/4   | 2-1/2  | 58,800                           |
| 7/8                | ID-387-X         | IS-387          | 1-1/2-6 | 9-3/4            | 19-7/8   | 3      | 79,600                           |
| 1                  | ID-399-X         | IS-399          | 1-3/4-5 | 12-3/4           | 23-7/64  | 3      | 103,400                          |
| 1-1/8              | ID-3112-X        | IS-3112         | 1-3/4-5 | 13-1/8           | 25-9/16  | 3      | 130,000                          |
| 1-1/4              | ID-3125-X        | IS-3125         | 1-3/4-5 | 13-1/8           | 26-11/16 | 3-1/2  | 159,800                          |
| 1-3/8              | ID-3137-X        | IS-3137         | 2-4-1/2 | 16-5/8           | 34-7/16  | 4      | 192,000                          |
| 1-1/2              | ID-3150-X        | IS-3150         | 2-4-1/2 | 16-5/8           | 34-7/16  | 4      | 228,000                          |