




[Machined Series] Closed Body Double Socket Turnbuckle

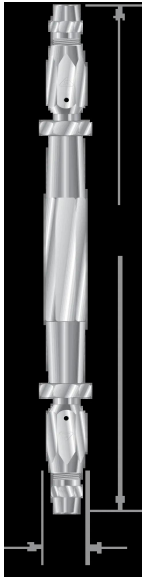

Electrolines's closed-body double socket wire rope turnbuckle features swageless rope terminations on both ends, allowing it to be quickly installed in the field without special tools or processes.

- Available for ropes from 1/4 to 1-1/2 inches in diameter. Breaking strength exceeds that of most ropes.
- Fitting strength exceeds the rated breaking strength of most ropes.
- Machined from solid steel, galvanized and zinc-plated options are available for increased corrosion resistance.

Specifications

Termination Type	Swageless
Connector Type	Swageless

Available Products

Rope Size (In.)	Part No.			Dimensions (In.)		Takeup	EIPS Breaking Strength (lbs.)
	Self-Colored Steel	Stainless Steel	Zinc Plated Steel	C - Min.	D		
1/16	ID-5506-N	IS-5506	ID-5506-V	6-3/8	1/2	2-1/2	480
3/32	ID-5509-N	IS-5509	ID-5509-V	7-1/4	9/16	2-7/8	920
1/8	ID-5512-N	IS-5512	ID-5512-V	7-1/4	9/16	2-7/8	1,700
5/32	ID-5515-N	IS-5515	ID-5515-V	8-5/8	3/4	3-1/8	2,400
3/16	ID-5518-N	IS-5518	ID-5518-V	8-5/8	3/4	3-1/8	3,700
7/32	ID-5521-N	IS-5521	ID-5521-V	11-7/8	7/8	4-13/16	4,800
1/4	ID-5525-N	IS-5525	ID-5525-V	11-7/8	7/8	4-13/16	6,800
9/32	ID-5528-N	IS-5528	ID-5528-V	12-7/8	1	4-9/16	8,000
5/16	ID-5531-N	IS-5531	ID-5531-V	12-7/8	1	4-9/16	10,540
3/8	ID-5537-N	IS-5537	ID-5537-V	14-1/2	1-1/16	5-5/16	15,100
7/16	ID-5543-N	IS-5543	ID-5543-V	18-5/8	1-5/16	8-1/16	20,400
1/2	ID-5550-N	IS-5550	ID-5550-V	19-1/4	1-7/16	8-1/16	26,600
9/16	ID-5556-N	IS-5556	ID-5556-V	25-5/8	2	11-1/2	33,600
5/8	ID-5562-N	IS-5562	ID-5562-V	25-5/8	2	11-1/2	41,200

discuss customization options.