




Stud Socket Fitting for Braided Jacket Kevlar Rope

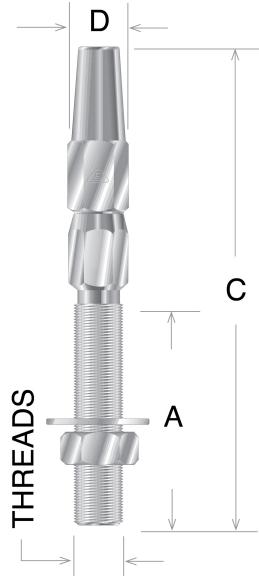

Electroline synthetic rope fittings for Kevlar rope with braided jackets excel in meeting the need for a quick, reliable end termination. These fittings use a swageless design with an internal taper pin that allows them to be installed in the field without special tools or complicated processes. They are selected for both the rope size and rated rope strength. This fitting features a threaded stud that can be used to connect and tension the rope to a fixed point.

- Available for rope 3/16 to 3/4" in size.
- Machined from aluminum to provide lightweight strength.

Specifications

Rope Material	Kevlar Rope
Jacket Type	Braided
Material	Aluminum
Connector Type	Stud
Termination Type	Swageless

Available Products

Rope Size (In.)	Part No.	Rated Breaking Strength (lbs.)	Dimensions (In.)		
			A	C	D
3/16	IKA-318	2400 to 4400	3	7-5/16	1
1/4	IKA-325	4400 to 6000	4-3/4	10	1-1/8
5/16	IKA-331	6000 to 9000	5-1/8	11	1-3/8
3/8	IKA-337	9000 to 13000	5-1/8	12	1-1/2
1/2	IKA-350	16000 to 22000	7-1/8	16	2
5/8	IKA-362	28000 to 37000	7-1/8	17	2
3/4	IKA-375	35000 to 63000	10	21-3/4	3