




## Stud Socket Fitting for Extruded Jacket Kevlar Rope

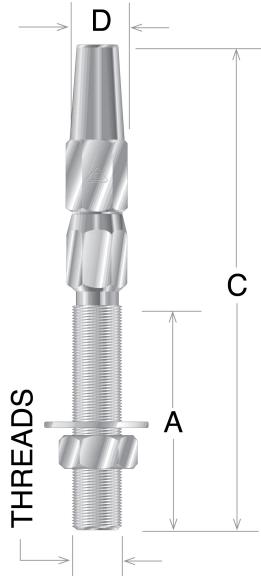

Electroline synthetic rope fittings for Kevlar ropes with extruded jackets excel in meeting the need for a quick, reliable end termination. The fittings perform on polyurethane, Nylon II, and Hytrel jacket materials for ropes with the following construction: standard wire rope, contra-helical, parallel, and electro-mechanical. This fitting features a clevis (fork/jaw) connection and a swageless rope termination, allowing it to be quickly installed in the field without special tools.

- Available for rope 3/16 to 3/4" in size.
- Machined from aluminum to provide lightweight strength.

### Specifications

Rope Material	Kevlar Rope
Jacket Material	Hytrel, Nylon II, Polyurethane
Jacket Type	Extruded
Material	Aluminum
Connector Type	Stud
Termination Type	Swageless

### Available Products

Rope Size (In.)	Part No.	Thread	Dimensions (In.)		
			A	C	D
3/16	KA-318	1/2-13	4-3/4	8-3/8	15/16
1/4	KA-325	5/8-11	4-3/4	9-3/8	1
5/16	KA-331	3/4-10	5	10-7/8	1-1/8
3/8	KA-337	3/4-10	5-1/8	11-7/8	1-1/4
7/16	KA-343	7/8-9	6	15	1-1/2
1/2	KA-350	1-8	6-3/4	16-1/8	1-3/4
9/16	KA-356	1-1/8-7	7-1/8	17-1/2	2
5/8	KA-362	1-1/4-7	7-1/8	18-7/8	2-1/8
3/4	KA-375	1-1/2-6	8	21	2-1/2