


ELECTROLINE®

QUICK CONNECT. STRONG SUPPORT.

3000 SERIES



Swageless & Clevis Roller Bearing Swivel - Model 34

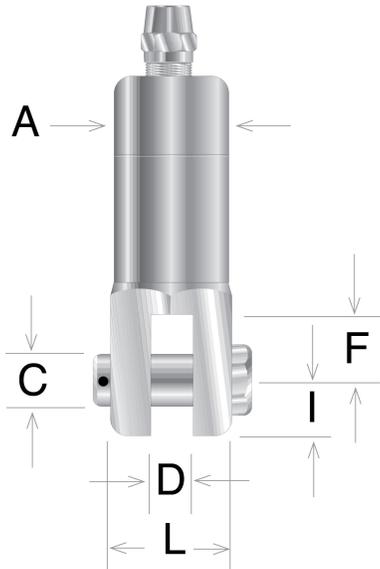

Electroline's Model 33 industrial swivel features a swageless rope termination and a clevis (fork/jaw) fitting with a pin. Utilizing a single roller bearing, this economical swivel enables smooth, higher-torque rotation for the shorter rope lengths used in lifting equipment and similar applications.

- Swageless rope termination allows the swivel to be field-installed without expensive tools or complicated processes.
- Made from alloy steel and zinc-plated for corrosion resistance.
- Ultimate strength exceeds the rated Working Load Limit (WLL).

Specifications

Material	Zinc-Plated Steel
Termination Type	Swageless
Connector Type	Clevis
Water Pressure Resistance	Moderate

Available Products

Rope Size (In.)	Part No.	WLL 3:1 (Pounds)	WLL 5:1 (Pounds)	Dimensions (In.)						Overall Length
				A	C - Pin Dia.	D	F	I	L	
1/8	3412	1,666	1,000	7/8	1/4	1/4	1/2	7/16	-	3-15/16
3/16	3418	2,066	1,240	1	5/16	5/16	5/8	1/2	-	4-9/16
1/4	3425	2,500	1,500	1-1/8	3/8	3/8	3/4	9/16	-	5-3/16
5/16	3431	5,000	3,000	1-7/8	3/4	13/16	1-3/8	1	2	7-7/16
3/8	3437	6,666	4,000	1-7/8	3/4	13/16	1-3/8	1	2	7-15/16
7/16	3443	10,000	6,000	2-3/8	3/4	1	1-3/8	1-1/8	2-1/4	9-1/2
1/2	3450	10,000	6,000	2-3/8	3/4	1	1-3/8	1-1/8	2-1/4	9-1/2
9/16	3456	16,666	10,000	3-1/4	1	1-1/8	1-3/4	1-1/4	3	11-11/16
5/8	3462	16,666	10,000	3-1/4	1	1-1/8	1-3/4	1-1/4	3	11-11/16
3/4	3475	28,333	17,000	3-5/8	1-1/8	1-9/16	2-1/8	1-1/2	3-1/4	13-5/8
7/8	3487	33,333	20,000	3-3/4	1-1/4	1-3/4	3-1/8	1-7/8	3-1/2	16-1/2
1	3499	50,000	30,000	4-1/8	1-3/8	1-3/4	3-1/8	1-7/8	4	17-15/16

discuss customization options.