


# ELECTROLINE®

QUICK CONNECT. STRONG SUPPORT.

6000 SERIES GOLD BAND™



## Swageless & Hook Angular Contact Bearing Swivel - Model 60

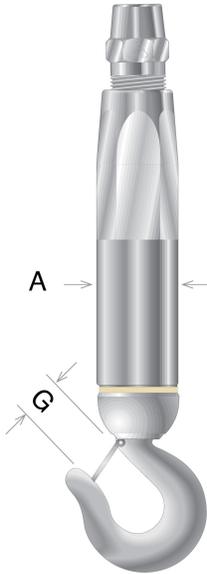

Electroline's Model 60 industrial swivel features a swageless rope termination and a hook. Featuring permanently lubricated angular contact bearings, this swivel provides higher-speed, low-torque rotation for longer rope lengths used in multiple applications. The tapered design helps prevent snagging on other equipment or cables.

- Swageless rope termination allows the swivel to be field-installed without expensive tools or complicated processes.
- Ultimate strength exceeds the rated Working Load Limit (WLL).
- Built with high-strength alloy steel and zinc-plated for corrosion resistance.

### Specifications

Material	Zinc-Plated Alloy Steel
Termination Type	Swageless
Connector Type	Hook
Water Pressure Resistance	Moderate

### Available Products

Rope Size (In.)	Part No.	WLL 3:1 (Pounds)	WLL 5:1 (Pounds)	Dimensions (In.)		Length to Inside of Hook
				A	G	
1/8	6012	2,300	1,380	7/8	7/8	5-5/16
1/4	6025	5,000	3,000	1-1/4	31/32	8-5/16
3/8	6037	8,000	4,800	1-1/2	1	9-1/2
1/2	6050	11,500	6,900	1-7/8	1-11/32	12-15/16
5/8	6062	18,500	11,100	2-7/16	1-11/16	17-9/16
3/4	6075	31,500	18,900	2-7/8	2-1/4	21-1/8
3/4	6081	31,500	18,900	2-7/8	2-1/4	21-1/8
7/8	6087	33,333	20,000	3-5/8	3	25-15/16
1	6099	50,000	30,000	3-5/8	3	27-13/16
1-1/4	60125	83,333	50,000	4-1/2	4	40-9/16
1-1/2	60150	116,667	70,000	5-3/8	4-1/4	48-1/8

discuss customization options.