


ELECTROLINE®

QUICK CONNECT. STRONG SUPPORT.

6000 SERIES GOLD BAND™



Eye & Hook Angular Contact Bearing Swivel - Model 61

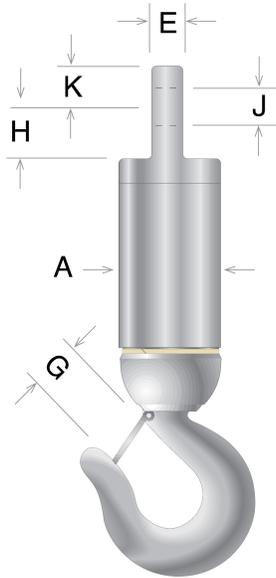

Electroline's Model 61 industrial swivel features an eye-end fitting and a hook. Utilizing permanently lubricated angular contact bearings, the swivel provides higher-speed, low-torque rotation for longer rope lengths used in multiple applications.

- The tapered design helps prevent snagging on other equipment or cables.
- Ultimate strength exceeds the rated Working Load Limit (WLL).
- Built with high-strength alloy steel and zinc-plated for corrosion resistance.

Specifications

Material	Zinc-Plated Alloy Steel
Termination Type	Eye
Connector Type	Hook
Water Pressure Resistance	Moderate

Available Products

Part No.	WLL 3:1 (Pounds)	WLL 5:1 (Pounds)	Dimensions (In.)						Length to Inside of Hook
			A	E	G	H	J - Hole Dia.	K	
6112	2,300	1,380	7/8	1/4	7/8	3/8	1/4	3/8	5-3/8
6125	5,000	3,000	1-1/4	5/16	31/32	1/2	3/8	7/16	7-1/16
6137	8,000	4,800	1-1/2	1/2	1	23/32	5/8	5/8	7-7/8
6150	11,500	6,900	1-7/8	3/4	1-11/32	15/16	7/8	15/16	10-13/16
6162	18,500	11,100	2-7/16	1	1-11/16	1-5/16	1-1/4	1-3/16	15-1/4
6175	31,500	18,900	2-7/8	1-1/4	2-1/4	1-5/8	1-3/8	1-1/2	18-7/8
6181	31,500	18,900	2-7/8	1-1/4	2-1/4	1-5/8	1-3/8	1-1/2	18-7/8
6187	33,333	20,000	3-5/8	1-23/32	3	2-27/32	1-5/8	1-13/16	24-15/16
6199	50,000	30,000	3-5/8	2	3	2-25/32	2	2-1/8	25-11/16
61125	83,333	50,000	4-1/2	2-1/8	4	2-7/8	2-1/4	2-3/8	33-13/16
61150	116,667	70,000	5-3/8	2-1/4	4-1/4	3-1/8	2-1/4	2-3/8	39-5/8

PDF generated on 2026-03-18 at 07:00 by electrolineusa.com. Information is provided for reference only. Please contact Electroline at info@electrolineusa.com or 1-800-321-0870 to confirm specifications or discuss customization options.