


ELECTROLINE®

QUICK CONNECT. STRONG SUPPORT.

6000 SERIES GOLD BAND™



Clevis & Hook Angular Contact Bearing Swivel - Model 62

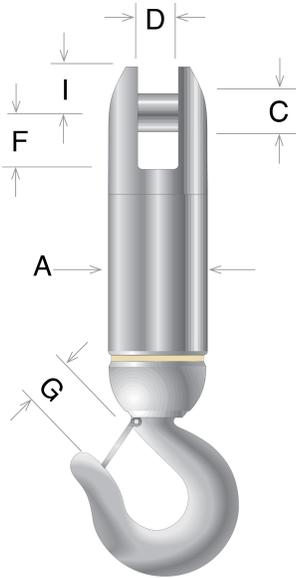

Electroline's Model 62 industrial swivel features a clevis (fork/jaw) fitting and a hook. Utilizing permanently lubricated angular contact bearings, the swivel provides higher-speed, low-torque rotation for longer rope lengths used in multiple applications.

- The tapered design helps prevent snagging on other equipment or cables.
- Ultimate strength exceeds the rated Working Load Limit (WLL).
- Built with high-strength alloy steel and zinc-plated for corrosion resistance.

Specifications

Material	Zinc-Plated Alloy Steel
Termination Type	Clevis
Connector Type	Hook
Water Pressure Resistance	Moderate

Available Products

Part No.	WLL 3:1 (Pounds)	WLL 5:1 (Pounds)	Dimensions (In.)						Length to Inside of Hook
			A	C - Pin Dia.	D	F	G	I	
6212	2,300	1,380	7/8	7/8	5/16	15/32	7/8	3/8	5-3/8
6225	5,000	3,000	1-1/4	1	19/32	11/16	31/32	7/16	7-1/8
6237	8,000	4,800	1-1/2	1-1/8	19/32	13/16	1	9/16	7-13/16
6250	11,500	6,900	1-7/8	1-1/2	3/4	15/16	1-11/32	13/16	10-15/16
6262	18,500	11,100	2-7/16	1-1/2	1	1-9/16	1-11/16	1-1/8	15-1/4
6275	31,500	18,900	2-7/8	5/16	1-9/32	2-1/8	2-1/4	1-1/4	18-7/8
6281	31,500	18,900	2-7/8	3/8	1-9/16	2-1/8	2-1/4	1-1/4	18-7/8
6287	33,333	20,000	3-5/8	7/16	1-3/4	3-1/2	3	1-3/4	24-15/16
6299	50,000	30,000	3-5/8	5/8	1-3/4	3-1/2	3	1-3/4	25-11/16
62125	83,333	50,000	4-1/2	1-7/8	2	3-11/16	4	2-3/8	34
62150	116,667	70,000	5-3/8	2	2	3-11/16	4-1/4	2-3/8	40

PDF generated on 2026-03-20 at 10:14 by electrolineusa.com. Information is provided for reference only. Please contact Electroline at info@electrolineusa.com or 1-800-321-0870 to confirm specifications or discuss customization options.