




Swageless & Eye Angular Contact Bearing Swivel - Model 63

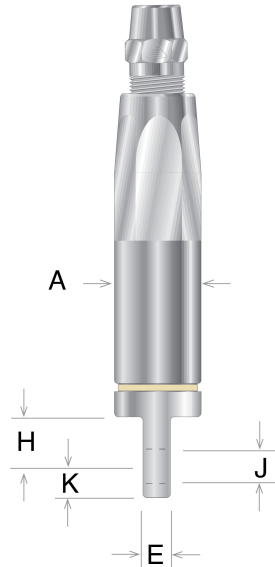

Electroline's Model 63 industrial swivel features a swageless rope termination and an eye-end fitting. Utilizing permanently lubricated angular contact bearings, the swivel provides higher-speed, low-torque rotation for longer rope lengths used in multiple applications. The tapered design helps prevent snagging on other equipment or cables.

- Swageless rope termination allows the swivel to be field-installed without expensive tools or complicated processes.
- Ultimate strength exceeds the rated Working Load Limit (WLL).
- Built with high-strength alloy steel and zinc-plated for corrosion resistance.

Specifications

Material	Zinc Plated Alloy Steel
Termination Type	Swageless
Connector Type	Eye
Water Pressure Resistance	Moderate

Available Products

Rope Size (In.)	Part No.	WLL 3:1 (Pounds)	WLL 5:1 (Pounds)	Dimensions (In.)					Overall Length
				A	E	H	J - Hole Dia.	K	
1/8	6312	2300	1380	7/8	1/4	3/8	1/4	3/8	3-7/8
1/4	6325	5000	3000	1-1/4	5/16	1/2	3/8	7/16	5-7/8
3/8	6337	8000	4800	1-1/2	1/2	23/32	5/8	5/8	6-13/16
1/2	6350	11500	6900	1-7/8	3/4	15/16	7/8	15/16	9-1/8
5/8	6362	18500	11100	2-7/16	1	1-5/16	1-1/4	1-3/16	12-12/16
3/4	6375	31500	18900	2-7/8	1-1/4	1-5/8	1-3/8	1-1/2	14-11/16
3/4	6381	31500	18900	2-7/8	1-1/4	1-5/8	1-3/8	1-1/2	14-11/16
7/8	6387	33333	20000	3-5/8	1-23/32	2-27/32	1-5/8	1-13/16	18
1	6399	50000	30000	3-5/8	2	2-25/32	2	2-1/8	19-7/8
1-1/4	63125	83333	50000	4-1/2	2-1/8	2-7/8	2-1/4	2-3/8	27-1/2
1-1/2	63150	116667	70000	5-3/8	2-1/4	3-1/8	2-1/4	2-3/8	31

discuss customization options.