




Swageless & Clevis Angular Contact Bearing Swivel - Model 64

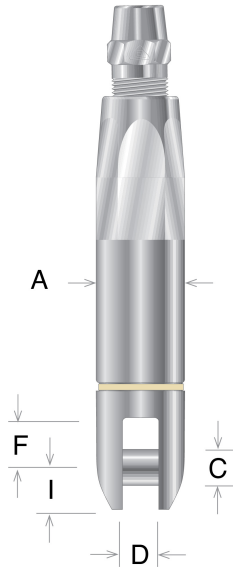

Electroline's Model 64 industrial swivel features a swageless rope termination and a clevis (fork/jaw) fitting with a pin. Utilizing permanently lubricated angular contact bearings, the swivel provides higher-speed, low-torque rotation for longer rope lengths used in multiple applications. The tapered ends are designed to help prevent snagging on other equipment or cables.

- Swageless rope termination allows the swivel to be field-installed without expensive tools or complicated processes.
- Ultimate strength exceeds the rated Working Load Limit (WLL).
- Built with high-strength alloy steel and zinc-plated for corrosion resistance.

Specifications

Material	Zinc Plated Alloy Steel
Termination Type	Swageless
Connector Type	Clevis
Water Pressure Resistance	Moderate

Available Products

Rope Size (In.)	Part No.	WLL 3:1 (Pounds)	WLL 5:1 (Pounds)	Dimensions (In.)					Overall Length
				A	C - Pin Dia.	D	F	I	
1/8	6412	2300	1380	7/8	5/16	5/16	15/32	3/8	3-7/8
1/4	6425	5000	3000	1-1/4	3/8	19/32	11/16	7/16	5-7/8
3/8	6437	8000	4800	1-1/2	7/16	19/32	13/16	9/16	6-13/16
1/2	6450	11500	6900	1-7/8	5/8	3/4	15/16	13/16	9-1/8
5/8	6462	18500	11100	2-7/16	7/8	1	1-9/16	1-1/8	12-3/4
3/4	6481	31500	18900	2-7/8	1-1/8	1-9/16	2-1/8	1-1/4	14-11/16
3/4	6475	31500	18900	2-7/8	1	1-9/32	2-1/8	1-1/4	14-11/16
7/8	6487	33333	20000	3-5/8	1-1/2	1-3/4	3-1/2	1-3/4	18
1	6499	50000	30000	3-5/8	1-1/2	1-3/4	3-1/2	1-3/4	19-7/8
1-1/4	64125	83333	50000	4-1/2	1-7/8	2	3-11/16	2-3/8	27-1/2
1-1/2	64150	116667	70000	5-3/8	2	2	3-11/16	2-3/8	31

discuss customization options.