


ELECTROLINE®

QUICK CONNECT. STRONG SUPPORT.

6000 SERIES GOLD BAND™



Eye & Clevis Angular Contact Bearing Swivel - Model 65

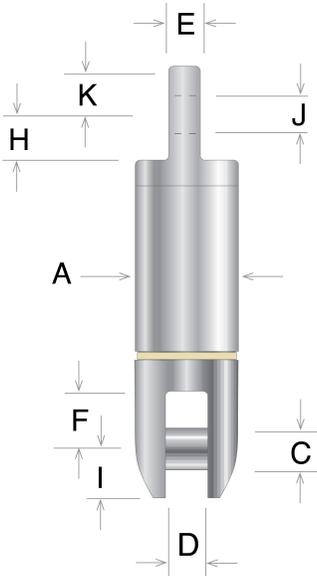

Electroline's Model 65 industrial swivel features an eye-end fitting and a clevis (fork/jaw) fitting. Utilizing permanently lubricated angular contact bearings, the swivel provides higher-speed, low-torque rotation for longer rope lengths used in multiple applications. The tapered ends are designed to prevent snags on other equipment or cables.

- Ultimate strength exceeds the rated Working Load Limit (WLL).
- Built with high-strength alloy steel and zinc-plated for corrosion resistance.
- Note: Model 65 is a reversed design of the Model 68 Clevis/Eye Swivel.

Specifications

| | |
|---------------------------|-------------------------|
| Material | Zinc-Plated Alloy Steel |
| Termination Type | Clevis, Eye |
| Connector Type | Clevis, Eye |
| Water Pressure Resistance | Moderate |

Available Products

Dimensions (In.)

| Part No. | WLL 3:1 (Pounds) | WLL 5:1 (Pounds) | A | C - Pin Dia. | D | E | F | H | I | J - Hole Dia. | K | Overall Length |
|----------|------------------|------------------|--------|--------------|--------|---------|---------|---------|-------|---------------|---------|----------------|
| 6512 | 2,300 | 1,380 | 7/8 | 5/16 | 5/16 | 1/4 | 15/32 | 3/8 | 3/8 | 1/4 | 3/8 | 3-1/8 |
| 6525 | 5,000 | 3,000 | 1-1/4 | 3/8 | 19/32 | 5/16 | 11/16 | 1/2 | 7/16 | 3/8 | 7/16 | 4-9/16 |
| 6537 | 8,000 | 4,800 | 1-1/2 | 7/16 | 19/32 | 1/2 | 13/16 | 23/32 | 9/16 | 5/8 | 5/8 | 5-1/8 |
| 6550 | 11,500 | 6,900 | 1-7/8 | 5/8 | 3/4 | 3/4 | 15/16 | 15/16 | 13/16 | 7/8 | 15/16 | 7-1/8 |
| 6562 | 18,500 | 11,100 | 2-7/16 | 7/8 | 1 | 1 | 1-9/16 | 1-5/16 | 1-1/8 | 1-1/4 | 1-3/16 | 10-1/2 |
| 6575 | 31,500 | 18,900 | 2-7/8 | 1 | 1-9/32 | 1-1/4 | 2-1/8 | 1-5/8 | 1-1/4 | 1-3/8 | 1-1/2 | 12-7/16 |
| 6581 | 31,500 | 18,900 | 2-7/8 | 1-1/8 | 1-9/16 | 1-1/4 | 2-1/8 | 1-5/8 | 1-1/4 | 1-3/8 | 1-1/2 | 12-7/16 |
| 6587 | 33,333 | 20,000 | 3-5/8 | 1-1/2 | 1-3/4 | 1-23/32 | 3-1/2 | 2-27/32 | 1-3/4 | 1-5/8 | 1-13/16 | 17 |
| 6599 | 50,000 | 30,000 | 3-5/8 | 1-1/2 | 1-3/4 | 2 | 3-1/2 | 2-25/32 | 1-3/4 | 2 | 2-1/8 | 17-3/4 |
| 65125 | 83,333 | 50,000 | 4-1/2 | 1-7/8 | 2 | 2-1/8 | 3-11/16 | 2-7/8 | 2-3/8 | 2-1/4 | 2-3/8 | 20-5/16 |
| 65150 | 116,667 | 70,000 | 5-3/8 | 2 | 2 | 2-1/4 | 3-11/16 | 3-1/8 | 2-3/8 | 2-1/4 | 2-3/8 | 21-9/16 |

discuss customization options.