




## Eye & Eye Angular Contact Bearing Swivel - Model 66

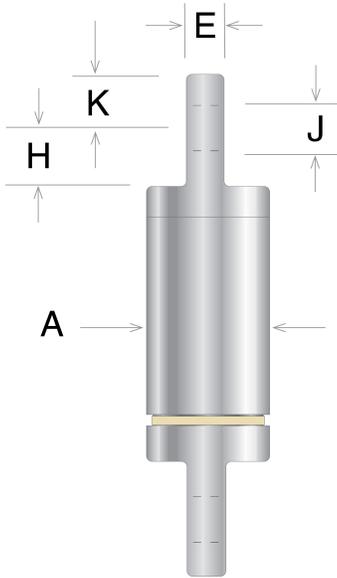

Electroline's Model 66 industrial swivel features two eye-end fittings. Utilizing permanently lubricated angular contact bearings, the swivel provides higher-speed, low-torque rotation for longer rope lengths used in multiple applications.

- Tapered ends are designed to help prevent snagging on other equipment or cables.
- Ultimate strength exceeds the rated Working Load Limit (WLL).
- Built with high-strength alloy steel and zinc-plated for corrosion resistance.

### Specifications

Material	Zinc-Plated Alloy Steel
Termination Type	Eye
Connector Type	Eye
Water Pressure Resistance	Moderate

### Available Products

Part No.	WLL 3:1 (Pounds)	WLL 5:1 (Pounds)	Dimensions (In.)					Overall Length
			A	E	H	J - Hole Dia.	K	
6612	2,300	1,380	7/8	1/4	3/8	1/4	3/8	3-1/8
6625	5,000	3,000	1-1/4	5/16	1/2	3/8	7/16	4-9/16
6637	8,000	4,800	1-1/2	1/2	23/32	5/8	5/8	5-9/16
6650	11,500	6,900	1-7/8	3/4	15/16	7/8	15/16	7-1/8
6662	18,500	11,100	2-7/16	1	1-5/16	1-1/4	1-3/16	10-1/2
6675	31,500	18,900	2-7/8	1-1/4	1-5/8	1-3/8	1-1/2	12-7/16
6681	31,500	18,900	2-7/8	1-1/4	1-5/8	1-3/8	1-1/2	12-7/16
6687	33,333	20,000	3-5/8	1-23/32	2-27/32	1-5/8	1-13/16	17
6699	50,000	30,000	3-5/8	2	2-25/32	2	2-1/8	17-3/4
66125	83,333	50,000	4-1/2	2-1/8	2-7/8	2-1/4	2-3/8	20-5/16
66150	116,667	70,000	5-3/8	2-1/4	3-1/8	2-1/4	2-3/8	21-9/16