




## Clevis & Clevis Angular Contact Bearing Swivel - Model 67

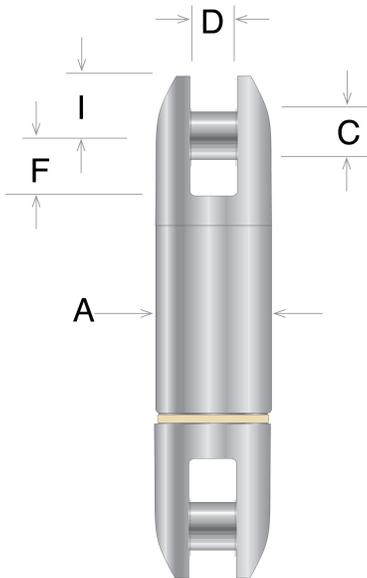

Electroline's Model 67 industrial swivel features two clevis (fork/jaw) fittings with included pins. Utilizing permanently lubricated angular contact bearings, the swivel provides higher-speed, low-torque rotation for longer rope lengths used in multiple applications.

- Tapered ends help prevent snagging on other equipment or cables.
- Ultimate strength exceeds the rated Working Load Limit (WLL).
- Built with high-strength alloy steel and zinc-plated for corrosion resistance.

### Specifications

Material	Zinc-Plated Alloy Steel
Termination Type	Clevis
Connector Type	Clevis
Water Pressure Resistance	Moderate

### Available Products

Part No.	WLL 3:1 (Pounds)	WLL 5:1 (Pounds)	Dimensions (In.)					Overall Length
			A	C - Pin Dia.	D	F	I	
6712	2,300	1,380	7/8	5/16	5/16	15/32	3/8	3-1/16
6725	5,000	3,000	1-1/4	3/8	19/32	11/16	7/16	4-1/2
6737	8,000	4,800	1-1/2	7/16	19/32	13/16	9/16	5-15/32
6750	11,500	6,900	1-7/8	5/8	3/4	15/16	13/16	7-1/8
6762	18,500	11,100	2-7/16	7/8	1	1-9/16	1-1/8	10-1/2
6775	31,500	18,900	2-7/8	1	1-9/32	2-1/8	1-1/4	12-7/16
6781	31,500	18,900	2-7/8	1-1/8	1-9/16	2-1/8	1-1/4	12-7/16
6787	33,333	20,000	3-5/8	1-1/2	1-3/4	3-1/2	1-3/4	17
6799	50,000	30,000	3-5/8	1-1/2	1-3/4	3-1/2	1-3/4	17-3/4
67125	83,333	50,000	4-1/2	1-7/8	2	3-11/16	2-3/8	20-5/16
67150	116,667	70,000	5-3/8	2	2	3-11/16	2-3/8	21-9/16