




## Clevis & Eye Angular Contact Bearing Swivel - Model 68

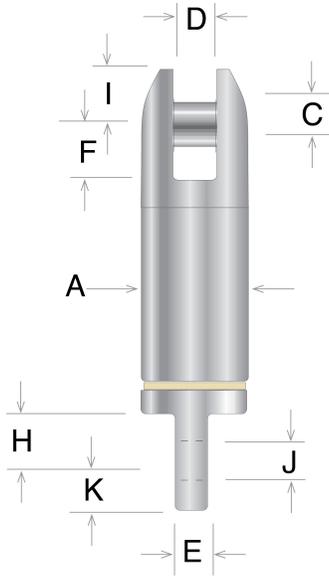

Electroline's Model 68 industrial swivel features a clevis (fork/jaw) fitting with a pin and an eye-end fitting. Utilizing permanently lubricated angular contact bearings, the swivel provides higher-speed, low-torque rotation for longer rope lengths used in multiple applications. The tapered ends help prevent snagging on other equipment or cables.

- Ultimate strength exceeds the rated Working Load Limit (WLL).
- Built with high-strength alloy steel and zinc-plated for corrosion resistance.
- Note: Model 68 is a reversed design of the Model 65 Eye/Clevis Swivel.

### Specifications

Material	Zinc-Plated Alloy Steel
Termination Type	Clevis, Eye
Connector Type	Clevis, Eye
Water Pressure Resistance	Moderate

### Available Products

#### Dimensions (In.)

Part No.	WLL 3:1 (Pounds)	WLL 5:1 (Pounds)	A	C - Pin Dia.	D	E	F	H	I	J - Hole Dia.	K	Overall Length
6812	2,300	1,380	7/8	5/16	5/16	1/4	15/32	3/8	3/8	1/4	3/8	3-1/8
6825	5,000	3,000	1-1/4	3/8	19/32	5/16	11/16	1/2	7/16	3/8	7/16	4-9/16
6837	8,000	4,800	1-1/2	7/16	19/32	1/2	13/16	23/32	9/16	5/8	5/8	5-1/8
6850	11,500	6,900	1-7/8	5/8	3/4	3/4	15/16	15/16	13/16	7/8	15/16	7-1/8
6862	18,500	11,100	2-7/16	7/8	1	1	1-9/16	1-5/16	1-1/8	1-1/4	1-3/16	10-1/2
6875	31,500	18,900	2-7/8	1	1-9/32	1-1/4	2-1/8	1-5/8	1-1/4	1-3/8	1-1/2	12-7/16
6881	31,500	18,900	2-7/8	1-1/8	1-9/16	1-1/4	2-1/8	1-5/8	1-1/4	1-3/8	1-1/2	12-7/16
6887	33,333	20,000	3-5/8	1-1/2	1-3/4	1-23/32	3-1/2	2-27/32	1-3/4	1-5/8	1-13/16	17
6899	50,000	30,000	3-5/8	1-1/2	1-3/4	2	3-1/2	2-25/32	1-3/4	2	2-1/8	17-3/4
68125	83,333	50,000	4-1/2	1-7/8	2	2-1/8	3-11/16	2-7/8	2-3/8	2-1/4	2-3/8	20-5/16
68150	116,667	70,000	5-3/8	2	2	2-1/4	3-11/16	3-1/8	2-3/8	2-1/4	2-3/8	21-9/16

discuss customization options.