


ELECTROLINE®

QUICK CONNECT. STRONG SUPPORT.

GOLD BAND™ OCEANIC & SPECIALTY



Clevis & Clevis Sealed Swivel - Model SS-67

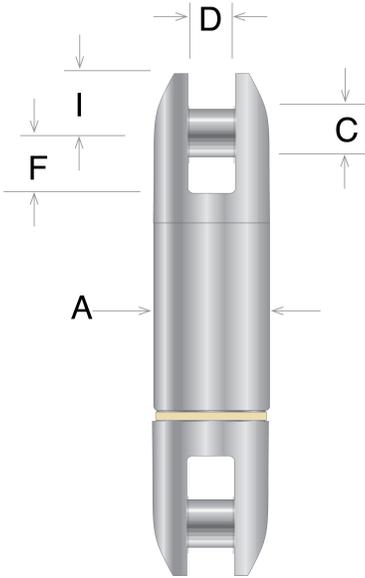

Electroline's Model SS-67 ocean-surface swivel is designed for above-water applications and features two clevis (fork/jaw) fittings with included pins. Constructed from stainless steel, the swivel has a grease-filled housing that is sealed to prevent water entry.

- Angular contact bearings provide higher-speed, low-torque rotation for longer rope lengths.
- The tapered ends are designed to prevent snags on other equipment or cables.
- Ultimate strength exceeds the rated Working Load Limit (WLL).

Specifications

Material	Stainless Steel
Termination Type	Clevis
Connector Type	Clevis
Water Pressure Resistance	Moderate

Available Products

Part No.	WLL 3:1 (Pounds)	WLL 5:1 (Pounds)	Dimensions (In.)					Overall Length
			A	C - Pin Dia.	D	F	I	
SS-6725	5,000	3,000	1-1/4	3/8	19/32	11/16	7/16	5
SS-6737	8,000	4,800	1-1/2	7/16	19/32	13/16	9/16	5-7/8
SS-6750	11,500	6,900	1-7/8	5/8	3/4	15/16	13/16	7-1/2
SS-6762	18,500	11,100	2-7/16	7/8	1	1-9/16	1-1/8	11

PDF generated on 2026-03-20 at 18:52 by electrolineusa.com. Information is provided for reference only. Please contact Electroline at info@electrolineusa.com or 1-800-321-0870 to confirm specifications or discuss customization options.