




Clevis & Eye Sealed Swivel - Model SS-68

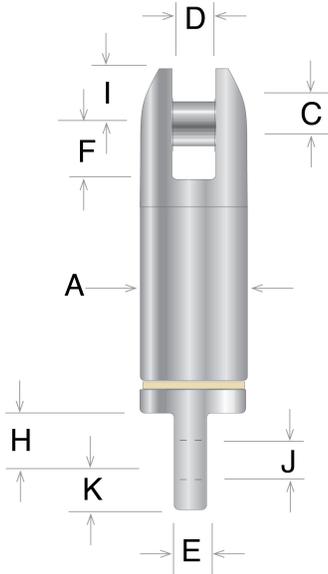

Electroline's Model SS-68 industrial swivel is designed for ocean surface (above water) application. It features a clevis (fork/jaw) fitting with a pin and an eye-end fitting. Constructed from stainless steel, the swivel has a grease-filled housing that is sealed to prevent water entry. The angular contact bearings provide higher-speed, low-torque rotation for longer rope lengths.

- The tapered ends are designed to prevent snags on other equipment or cables.
- Ultimate strength exceeds the rated Working Load Limit (WLL).
- Note: Model SS-68 is a reversed design of the Model SS-65 Clevis/Eye Swivel.

Specifications

Material	Stainless Steel
Termination Type	Clevis, Eye
Connector Type	Clevis, Eye
Water Pressure Resistance	Moderate

Available Products

Part No.	WLL 3:1 (Pounds)	WLL 5:1 (Pounds)	Dimensions (In.)									Overall Length
			A	C - Pin Dia.	D	E	F	H	I	J - Hole Dia.	K	
SS-6825	5,000	3,000	1-1/4	3/8	19/32	5/16	11/16	1/2	7/16	3/8	7/16	5
SS-6837	8,000	4,800	1-1/2	7/16	19/32	1/2	13/16	23/32	9/16	5/8	5/8	5-7/8
SS-6850	11,500	6,900	1-7/8	5/8	3/4	3/4	15/16	15/16	13/16	7/8	15/16	7-1/2
SS-6862	18,500	11,100	2-7/16	7/8	1	1	1-9/16	1-5/16	1-1/8	1-1/4	1-3/16	11

PDF generated on 2026-03-18 at 05:19 by electrolineusa.com. Information is provided for reference only. Please contact Electroline at info@electrolineusa.com or 1-800-321-0870 to confirm specifications or discuss customization options.