


ELECTROLINE®

QUICK CONNECT. STRONG SUPPORT.

HOOK (SWIVEL AND NON-SWIVEL)



Non-Swivel Hook Socket Fitting

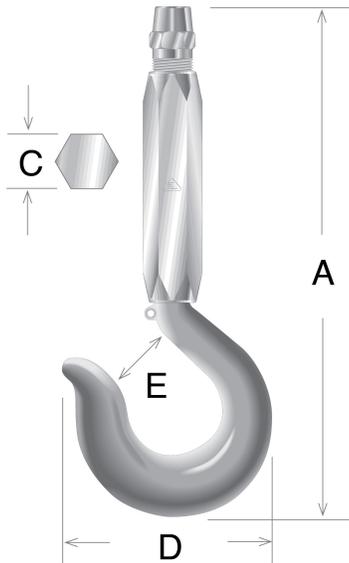

Electroline's non-swivel hook fitting features a swageless rope termination, allowing it to be quickly installed in the field without special tools or processes.

- For both wire and synthetic rope from 3/16 to 1 inch in size.
- Fitting strength exceeds the rated breaking strength of most ropes.
- Made from solid steel, a zinc-plated option is available for increased corrosion resistance.

Specifications

Termination Type	Swageless
Connector Type	Hook

Available Products

Rope Size (In.)	Part No.		Dimensions (In.)				IPS Breaking Strength (lbs.)
	Self-Colored Steel	Zinc Plated Steel	A	C	D	E	
3/16	Y-2618-N	Y-2618-V	5-5/16	3/4	2-7/8		3,340
1/4	Y-2625-N	Y-2625-V	5-7/8	15/16	3-3/16	1-1/16	5,880
5/16	Y-2631-N	Y-2631-V	6-21/32	15/16	3-5/8	1-1/8	9,160
3/8	Y-2637-N	Y-2637-V	7-19/32	1-1/8	4-3/32	1-1/4	13,120
7/16	Y-2643-N	Y-2643-V	8-5/16	1-1/4	4-3/32	1-1/4	17,780
1/2	Y-2650-N	Y-2650-V	9-23/32	1-7/16	4-15/16	1-1/2	23,000
9/16	Y-2656-N	Y-2656-V	12	1-9/16	6-1/2	1-7/8	29,000
5/8	Y-2662-N	Y-2662-V	12	1-3/4	6-1/2	1-7/8	35,800
3/4	Y-2675-N	Y-2675-V	14-1/2	2	7-9/16	2-1/4	51,200
7/8	Y-2687-N	Y-2687-V	16-15/32	2-1/8	8-11/16	2-1/2	69,200
1	Y-2699-N	Y-2699-V	19-3/16	2-1/2	11	3-3/8	89,800

PDF generated on 2026-03-21 at 19:23 by electrolineusa.com. Information is provided for reference only. Please contact Electroline at info@electrolineusa.com or 1-800-321-0870 to confirm specifications or discuss customization options.