




[Machined Series] Clevis Socket Fitting (with Pin and Cotter Pin)

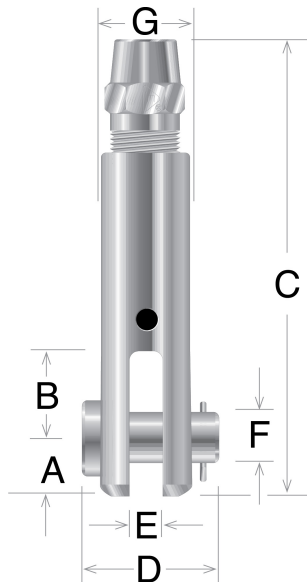

Electroline's machined clevis fitting (fork/jaw) includes a pin and cotter pin and features a swageless rope termination that allows it to be quickly installed in the field without special tools or processes.

- Available for ropes from 1/16 to 1-1/2 inches in size.
- Fitting strength exceeds the rated breaking strength of most ropes.
- Machined from solid steel or stainless steel; a zinc-plated option is available for increased corrosion resistance.

Specifications

Termination Type	Swageless
Connector Type	Clevis

Available Products

Rope Size (In.)	Part No.			Dimensions (In.)							EIPS Breaking Strength (lbs.)
	Self-Colored Steel	Stainless Steel	Zinc Plated Steel	A	B	C	D	E	F	G	
1/16	ID-106-N	IS-106	ID-106-V	17/64	3/8	2-1/16	45/64	3/16	3/16	1/2	480
3/32	ID-109-N	IS-109	ID-109-V	5/16	1/2	2-7/16	57/64	1/4	1/4	5/8	920
1/8	ID-112-N	IS-112	ID-112-V	5/16	1/2	2-7/16	57/64	1/4	1/4	5/8	1,700
5/32	ID-115-N	IS-115	ID-115-V	3/8	5/8	2-31/32	1-1/8	5/16	5/16	3/4	2,400
3/16	ID-118-N	IS-118	ID-118-V	3/8	5/8	2-31/32	1-1/8	5/16	5/16	3/4	3,700
7/32	ID-121-N	IS-121	ID-121-V	15/32	3/4	3-23/32	1-11/32	3/8	3/8	15/16	4,800
1/4	ID-125-N	IS-125	ID-125-V	15/32	3/4	3-23/32	1-11/32	3/8	3/8	15/16	6,800
9/32	ID-128-N	IS-128	ID-128-V	17/32	7/8	4-1/4	1-1/2	3/8	7/16	1-1/16	8,000
5/16	ID-131-N	IS-131	ID-131-V	17/32	7/8	4-1/4	1-1/2	3/8	7/16	1-1/16	10,540
3/8	ID-137-N	IS-137	ID-137-V	5/8	1	4-27/32	1-45/64	7/16	1/2	1-13/16	15,100
7/16	ID-143-N	IS-143	ID-143-V	51/64	1-3/8	6-11/32	2-5/32	1/2	11/16	1-9/16	20,400
1/2	ID-150-N	IS-150	ID-150-V	51/64	1-3/8	6-11/32	2-5/32	1/2	11/16	1-9/16	26,600
9/16	ID-156-N	IS-156	ID-156-V	1-3/64	1-17/32	7-19/32	2-5/8	11/16	15/16	2	33,600
5/8	ID-162-N	IS-162	ID-162-V	1-3/64	1-17/32	7-19/32	2-5/8	11/16	15/16	2	41,200
3/4	ID-175-N	IS-175	ID-175-V	1-15/64	1-27/32	8-29/32	3	3/4	1-1/8	2-5/16	58,800
7/8	ID-187-N	IS-187	ID-187-V	1-7/16	1-7/8	10-3/16	3-5/16	13/16	1-1/4	2-5/8	79,600

Rope Size (In.)	Part No.			Dimensions (In.)							EIPS Breaking Strength (lbs.)
	Self- Colored Steel	Stainless Steel	Zinc Plated Steel	A	B	C	D	E	F	G	
1	ID-199-N	IS-199	ID-199-V	1-3/4	2-1/4	12-3/16	4-11/64	15/16	1-1/2	3-1/2	103,400
1-1/8	ID-1112-N	IS-1112	ID-1112-V	2-1/8	2-3/4	14-5/8	5-11/64	1-1/8	1-5/8	3-3/4	130,000
1-1/4	ID-1125-N	IS-1125	ID-1125-V	2-1/4	3	16-7/8	4-7/8	1-1/4	1-3/4	4	159,800
1-3/8	ID-1137-N	IS-1137	ID-1137-V	2-3/4	3-1/2	21-3/8	5-5/32	1-1/2	2	4-1/4	192,000
1-1/2	ID-1150-N	IS-1150	ID-1150-V	2-3/4	3-1/2	21-3/8	5-5/16	1-3/4	2	4-1/2	228,000

PDF generated on 2026-01-18 at 06:30 by electrolineusa.com. Information is provided for reference only.
Please contact Electroline at info@electrolineusa.com or 1-800-321-0870 to confirm specifications or
discuss customization options.