


ELECTROLINE®

QUICK CONNECT. STRONG SUPPORT.

3000 SERIES



Socket & Hook Roller Bearing Swivel - Model 30

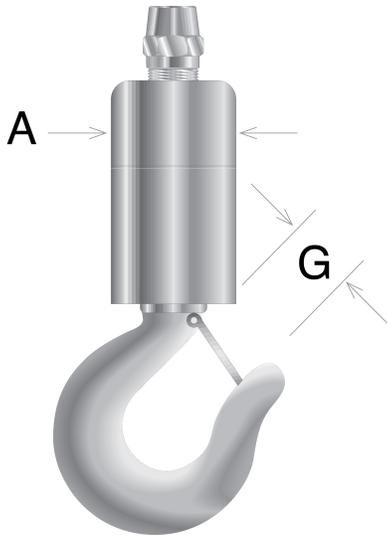

Electroline's Model 30 industrial swivel features a swageless rope termination and a hook. Utilizing a single roller bearing, this economical swivel enables smooth, higher-torque rotation for the shorter rope lengths used in lifting equipment and similar applications.

- Swageless rope termination allows the swivel to be field-installed without expensive tools or complicated processes.
- Made from alloy steel and zinc-plated for corrosion resistance.
- Ultimate strength exceeds the rated Working Load Limit (WLL).

Specifications

Water Pressure Resistance	Moderate
Termination Type	Swageless
Connector Type	Hook
Material	Zinc-Plated Steel

Available Products

Rope Size (In.)	Part No.	WLL 3:1 (Pounds)	WLL 5:1 (Pounds)	Dimensions (In.)		Length to Inside of Hook
				A	G	
5/16	3031	5,000	3,000	1-7/8	1	7
3/8	3037	6,666	4,000	1-7/8	1-1/16	7-7/8
7/16	3043	10,000	6,000	2-3/8	1-11/32	10-3/16
1/2	3050	10,000	6,000	2-3/8	1-11/32	10-3/16
9/16	3056	16,666	10,000	3-1/4	1-11/16	12-5/8
5/8	3062	16,666	10,000	3-1/4	1-11/16	12-5/8
3/4	3075	28,333	17,000	3-5/8	2-1/16	14-5/8
7/8	3087	33,333	20,000	3-3/4	2-1/4	16-11/16
1	3099	50,000	30,000	4-1/8	3	18-5/8

PDF generated on 2026-03-18 at 05:19 by electrolineusa.com. Information is provided for reference only. Please contact Electroline at info@electrolineusa.com or 1-800-321-0870 to confirm specifications or discuss customization options.