




Swageless & Eye Roller Bearing Swivel - Model 33

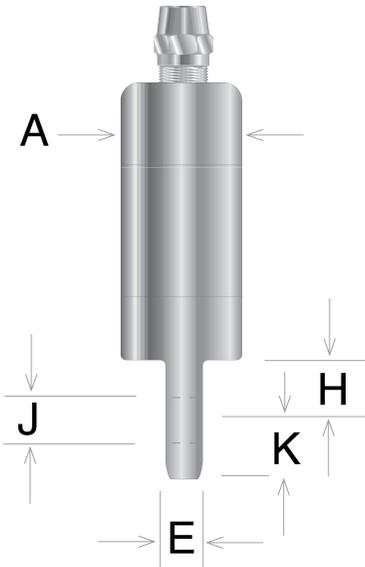

Electroline's Model 33 industrial swivel features a swageless rope termination and an eye-end fitting. Utilizing a single roller bearing, this economical swivel enables smooth, higher-torque rotation for the shorter rope lengths used in lifting equipment and similar applications.

- Swageless rope termination allows the swivel to be field-installed without expensive tools or complicated processes.
- Made from alloy steel and zinc-plated for corrosion resistance.
- Ultimate strength exceeds the rated Working Load Limit (WLL).

Specifications

Material	Zinc-Plated Steel
Water Pressure Resistance	Moderate
Termination Type	Swageless
Connector Type	Eye

Available Products

Rope Size (In.)	Part No.	WLL 3:1 (Pounds)	WLL 5:1 (Pounds)	Dimensions (In.)					Overall Length
				A	E	H	J - Hole Dia.	K	
1/8	3312	1,666	1,000	7/8	0.234	1/2	1/4	3/8	3-7/8
3/16	3318	2,066	1,240	1	0.297	9/16	5/16	1/2	4-1/2
1/4	3325	2,500	1,500	1-1/8	0.359	5/8	3/8	5/8	5-1/8
5/16	3331	5,000	3,000	1-7/8	11/16	1	13/16	15/16	7-11/16
3/8	3337	6,666	4,000	1-7/8	11/16	1	13/16	15/16	8-3/16
7/16	3343	10,000	6,000	2-3/8	3/4	1-3/16	1	1-1/8	9-15/16
1/2	3350	10,000	6,000	2-3/8	3/4	1-3/16	1	1-1/8	9-15/16
9/16	3356	16,666	10,000	3-1/4	1	1-1/2	1-1/4	1-1/2	12-1/4
5/8	3362	16,666	10,000	3-1/4	1	1-1/2	1-1/4	1-1/4	12-1/4
3/4	3375	28,333	17,000	3-5/8	1-1/4	1-5/8	1-3/8	1-5/8	14
7/8	3387	33,333	20,000	3-3/4	1-7/16	2-3/8	1-5/8	1-13/16	16-1/16
1	3399	50,000	30,000	4-1/8	1-7/8	2-3/8	2	2-1/8	18-15/16

discuss customization options.