


ELECTROLINE®

QUICK CONNECT. STRONG SUPPORT.

3000 SERIES



Eye & Clevis Roller Bearing Swivel - Model 35

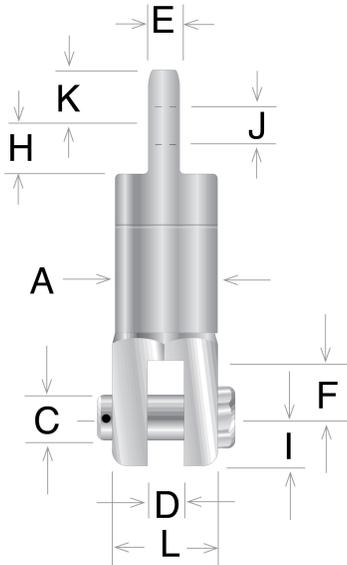

Electroline's Model 35 is a high-torque eye-end clevis swivel designed for industrial lifting applications. Utilizing a single roller bearing, this economical swivel enables smooth, higher-torque rotation for the shorter rope lengths used in lifting equipment and similar applications.

- Made from alloy steel and zinc-plated for corrosion resistance.
- Ultimate strength exceeds the rated Working Load Limit (WLL).
- Note: Model 35 is a reverse design of the Model 38 Clevis/Eye Swivel.

Specifications

Material	Zinc-Plated Steel
Termination Type	Clevis, Eye
Connector Type	Clevis, Eye
Water Pressure Resistance	Moderate

Available Products

Dimensions (In.)

Part No.	WLL 3:1 (Pounds)	WLL 5:1 (Pounds)	Dimensions (In.)										Overall Length
			A	C - Pin Dia.	D	E	F	H	I	J - Hole Dia.	K	L	
3512	1,666	1,000	7/8	1/4	1/4	0.234	1/2	1/2	7/16	1/4	3/8	-	3-1/2
3518	2,066	1,240	1	5/16	5/16	0.297	5/8	9/16	1/2	5/16	1/2	-	3-15/16
3525	2,500	1,500	1-1/8	3/8	3/8	0.359	3/4	5/8	9/16	3/8	5/8	-	4-7/16
3531	5,000	3,000	1-7/8	3/4	13/16	11/16	1-3/8	1	1	13/16	15/16	2	8-3/8
3537	6,666	4,000	1-7/8	3/4	13/16	11/16	1-3/8	1	1	13/16	15/16	2	8-9/16
3543	10,000	6,000	2-3/8	3/4	1	3/4	1-3/8	1-3/16	1-1/8	1	1-1/8	2-1/4	10-9/16
3550	10,000	6,000	2-3/8	3/4	1	3/4	1-3/8	1-3/16	1-1/8	1	1-1/8	2-1/4	10-9/16
3556	16,666	10,000	3-1/4	1	1-1/8	1	1-3/4	1-1/2	1-1/4	1-1/4	1-1/2	3	12-7/16
3562	16,666	10,000	3-1/4	1	1-1/8	1	1-3/4	1-1/2	1-1/4	1-1/4	1-1/4	3	12-7/16
3575	28,333	17,000	3-5/8	1-1/8	1-9/16	1-1/4	2-1/8	1-5/8	1-1/2	1-3/8	1-5/8	3-1/4	14-1/8
3587	33,333	20,000	3-3/4	1-1/4	1-3/4	1-7/16	3-1/8	2-3/8	1-7/8	1-5/8	1-13/16	3-1/2	16-13/16
3599	50,000	30,000	4-1/8	1-3/8	1-3/4	1-7/8	3-1/8	2-3/8	1-7/8	2	2-1/8	4	18-3/16

discuss customization options.